

1) PRESS **PI** BUTTON OR TOUCH **1** POSITION TO SWITCH SCREEN

1) HOW TO SET S/W MODE [(ON) 0 : ↓ off / (OFF) 1 : ↑ off]



- DIP_SW1 : Navigation On/Off
- DIP_SW2 : AV1 On/Off
- DIP_SW3 : AV2, FRONT CAMERA On/Off
- DIP_SW4 : REAR CAMERA On/Off [1]
- DIP_SW5 : MIRRORING On/Off
- DIP_SW6 : FRONT CAMERA On/Off
- DIP_SW7,8 : On

* Install front cam : set the dip S/W -> 3, 6 ON

* Front view will be appeared when placed P,N,D from reverse

[2]



PRESS FOR 2SEC TO SWITCH SCREEN

PRESS 2TIMES TO SWITCH SCREEN



when connect Navi IR to interface, you can change DMB channel (UP/DOWN)

Press the button for 2sec to switch screen



5) HOW TO ENTER NAV SETTING MODE




PRESS **OK** BUTTON 4 TIMES THEN

YOU WILL SEE THE NUMBER **1** ON THE LEFT TOP OF THE SCREEN FROM 1-4

WHEN IT' S NUMBER 4, PRESS THE **PI** BUTTON TO ENTER THE SETTING

[PAS&PDC INSTALLED VIEW]

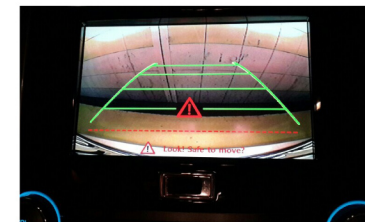

2) Press [1] or [2] to switch the screen



Please read carefully How to set Navi by R/C



you can set by R/C when you press right side of the blank section for 5sec for IR mode on



Press **OK** button within 7sec after disappear IR MODE ON



When you finish setting, IR MODE OFF pop up for 2sec after 7sec later


3) HOW TO SET REAR VIEW CAMERA DIP S/W (Using DATA cable)

- OEM CAMERA : DIP S/W 4 - OFF (If use PAS function, must ON)
- AFTER MARKET CAMERA : DIP S/W 4 - ON

4) Connect the CAN - Plug and Play


: OEM 9 HI, OEM 19 LOW, OEM 5 rear camera video + OEM 15 rear camera GND

[Air conditioning]

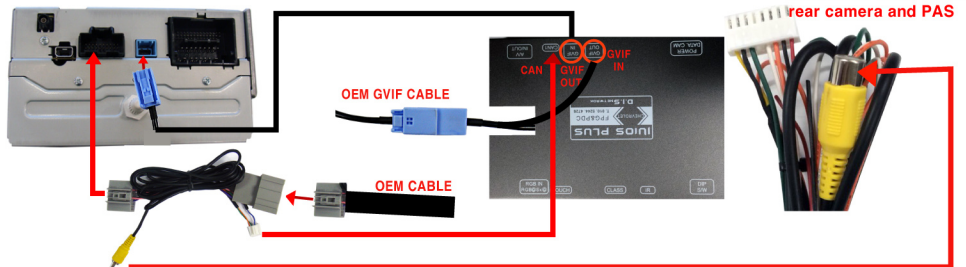

Connect it when using rear camera and PAS

[AIR CONDITIONING]

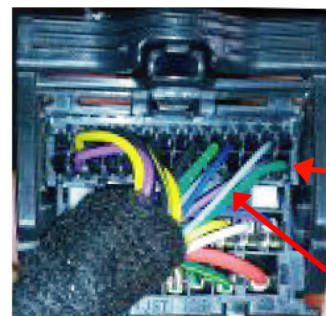

※ POWER CABLE SPEC ※

- ACC
- GND
- IR
- DATA
- REVERSE
- CAM-
- CAM+



CONNECT

Connect the OEM(Green) / Air conditioning (White) cable to Pin No.14

[COMPONENTS]

